

ULTRA

CEILING EXHAUST FANS



up to
482 m³/h



from
57 W



from
36 dBA



IPX4



FEATURES

Ultra-modern design

Ultra comfort lighting when using decorative panels with integrated LED light

Ultra high efficiency thanks to forward curved impeller

Ultra low resistance of the integrated backdraft damper

Ultra silent operation thanks to optimized casing design

Ultra easy installation and service thanks to optimized construction


Ultra trouble-free with 5 years' warranty

Replaceable decorative panels allow you to have a modern design in any style at any time.


Technical Data

Model	Ultra 250
Frequency [Hz]	50
Voltage [V]	220-240
Fan power [W]	57
Fan current @ 230V [A]	0.25
Max. airflow [m³/h (l/s)]	482 (134)
SFP [W/l/s]	0.43
Sound pressure level [dBA]*	36


*Sound pressure level measured in free space at a distance of 3 meters from the fan.

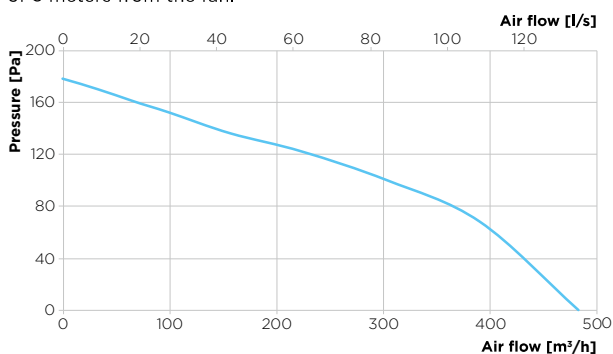

Overall Dimensions [mm]

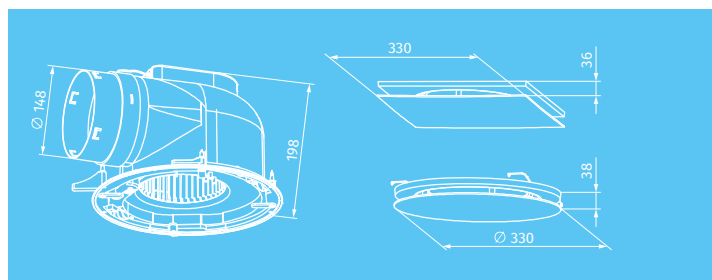

Mounting

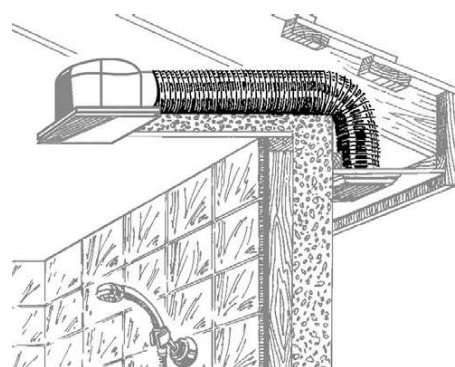

Options

The fan can be equipped with a turn-off delay timer (T)

LED Light Characteristics

Power input [W]	Luminous power [Lm]	Color temperature [K]	Beam angle
12	1000	3000 - 6000	120°

Ordering Information

Part Number	Model	Description
BLAULTRA	Ultra 250	300 mm Round Fan Housing
BLAULTRAT	Ultra 250 T	300 mm Round Fan Housing With Timer
BLAULTRASQGRILLE	DP Ultra 250 Square	Square Grille - White
BLAULTRAROGGRILLE	DP Ultra 250 Round	Round Grille - White
BLAULTRASQGRILLEBK	DP Ultra 250 Square Black	Square Grille - Black
BLAULTRAROGGRILLEBK	DP Ultra 250 Round Black	Round Grille - Black
BLAULTRASQGRILLELED	DP Ultra 250 Square Tri-Color Light	Square Grille - White With LED
BLAULTRAROGGRILLELED	DP Ultra 250 Round Tri-Color Light	Round Grille - White With LED

Decorative Panels

