



FANTECH TRADE

MADE FOR TRADE

Fantech Trade's team is made up of real **ventilation specialists** passionately supporting the trade. We provide the **best advice**, **the best products** and back it all up with **technical expertise**, application know-how and the highest level of support for our customers. Whether it's a straight forward exhaust air installation or a more complex commercial ventilation system, our expert team is here to help you choose the most suitable solution. When you're working with Fantech Trade, you will get **the best product for the job**.

Fantech Trade's range of ceiling fans blend sophisticated style with **reliable performance** and easy to install features to ensure both sparkies and home occupants are more than satisfied with the product.

AeroGlide

MAXIMISES AIR FLOW AND FAN EFFICIENCY

ENSURES SMOOTH, LOW NOISE OPERATION

SYSTEM

AeroGlide System is the next generation of innovative ceiling fan technology. It combines aerodynamic engineering techniques with state-of-the art motor design to maximise fan efficiency and achieve a balanced, ultra smooth rotational movement.

Impeller blade geometry has been fully optimised to enhance air flow volume and direct the air stream where it is needed.

Each model includes blades with a cutting edge twist profile design that improves air movement and overall fan performance.

PRODUCES BALANCED, AERODYNAMIC ROTATIONAL MOVEMENT

AeroGlide also incorporates ergonomic quick connect terminals that simplify wiring and allow fast, time saving installation.


The AeroGlide System is integrated into the Fantech Trade premium ceiling fan range, including the Quinton DC, Flair DC and Atmos DC.

Our years of fan engineering knowledge and expertise in air movement ensures AeroGlide's inherent attributes deliver strong efficient air flows and quiet operation.

SELECTING A CEILING FAN


The table below can be used as a general guide to select a suitable ceiling fan for different room types. Chart is based on standard ceiling heights up to 2.5m and 1 fan per room. Multiple fans may be required for large spaces.



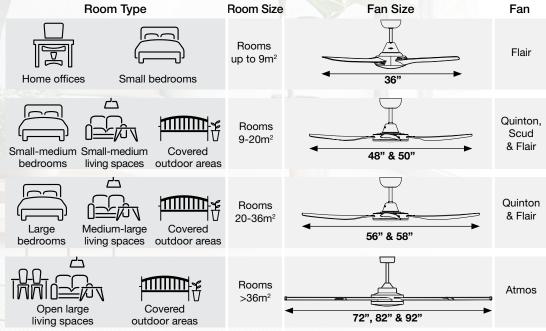


ANGLED CEILINGS

Fantech Trade ceiling fans can be installed on angled ceilings. Up to 15 degrees for Quinton DC, Flair DC & Scud DC models, and up to 13 degrees for Atmos DC models.



LED LIGHT


All models have an LED light option, in the form of either an in-built LED light, or LED light kit (sold separately). The LED can easily be changed to warm white, cool white or daylight at any time to meet your preference or match other installed lights. LED light can be controlled using wall switch or remote included with fan and can be dimmed using the remote.




(Colour Temperature: 3000K) (Colour Temperature: 4000K) Colour indicated in drawings above is for illustrative purposes only.

INCLUDED CONTROLLERS

QUINTON, SCUD & FLAIR REMOTE AND WALL SWITCH

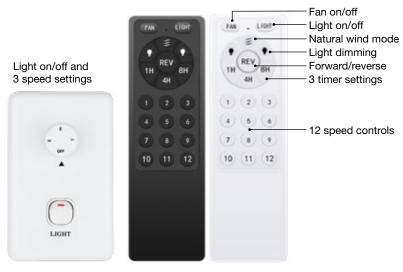




White remote comes with white fan, black remote comes with black fan. Wall controller and remote cannot be used in conjunction with each other.

REVERSIBLE ROTATION

All of our ceiling fans feature both Summer and Winter modes to ensure comfort all year round. The fans are reversible via remote control or fan body, dependent on installation method.







Quinton White QTNDC48WH QTNDC56WH

Quinton White with LED Light Kit QTNDC48WH & QTNDCLEDKITWH QTNDC56WH & QTNDCLEDKITWH Quinton Black QTNDC48BK QTNDC56BK

Quinton Black with LED Light Kit QTNDC48BK & QTNDCLEDKITBK QTNDC56BK & QTNDCLEDKITBK




The energy efficient Quinton DC ceiling fan provides exceptional air circulation and cooling effect within indoor and covered outdoor areas. It is made from durable ABS for a long working life and pre-balanced for smoother, low noise operation.


- High quality and energy efficient DC motor
- Innovative blade geometry maximises air flow & fan efficiency
- Utilises the latest ceiling fan technology and design
- Engineered for fast and efficient installation
- Suitable for indoor and covered outdoor areas
- Quick connect terminals simplify wiring
- 12 speed (with remote control)
- Remote and wall controller included
- Super quiet operation
- Optional CCT LED light kit available with dimming function via remote

DIMENSIONS

1220MM MODEL WITH/WITHOUT OPTIONAL LED LIGHT KIT



1420MM MODEL WITH/WITHOUT OPTIONAL LED LIGHT KIT



Dimensions in grey include optional LED light sold separately.

LED LIGHT KIT SPECIFICATIONS

SPECIFICATIONS

MODEL	DESCRIPTION	COLOUR	MAX. AIR FLOW M³/HR	WATTS	VOLTS	HERTZ
QTNDC48WH	1220mm/48" Fan	White	13,200	40	220-240	50
QTNDC48BK	1220mm/48" Fan	Black	13,200	40	220-240	50
QTNDC56WH	1420mm/56" Fan	White	14,580	40	220-240	50
QTNDC56BK	1420mm/56" Fan	Black	14,580	40	220-240	50
QTNDCLEDKITWH	LED Light Kit	White	÷	20	-	-
QTNDCLEDKITBK	LED Light Kit	Black	_	20	-	_

		QTNDC	LEDKITBK (BLACK)
LED Watts			20	
Light Colour Temperature		3000K	4000K	5000K
Lumens		1100	1250	1150
Dimmable			via remote	
OPTIONAL DOWNRODS				
PRODUCT CODE	LENGTH		COLOU	R
RODDC900WH	900mm		White	
RODDC900BK	900mm		Black	
RODDC1500WH	1500mm		White	
RODDC1500BK	1500mm		Black	

QTNDCLEDKITWH (WHITE)

^{*}Conditions apply. 2 year in home warranty service plus another 4 years on parts. For details visit: fantechtrade.com.au/warranty

^{**}White remote comes with white fan, black remote comes with black fan. Wall controller and remote cannot be used in conjunction with each other.

Flair 1270mm 3 Blade Ceiling Fan (FLRDC50BK) with LED Light Kit (FLRDCLEDKITBK) Flair White FLRDC36WH FLRDC50WH FLRDC58WH Flair Black FLRDC36BK FLRDC50BK FLRDC58BK Flair Black with LED Light Kit FLRDC36BK & FLRDCLEDKITBK FLRDC50BK & FLRDCLEDKITBK FLRDC58BK & FLRDCLEDKITBK Flair White with LED Light Kit FLRDC36WH & FLRDCLEDKITWH FLRDC50WH & FLRDCLEDKITWH FLRDC58WH & FLRDCLEDKITWH




The 3 blade Flair ceiling fan is fitted with a high quality and energy efficient DC motor, that provides exceptional air circulation and cooling effect. It is fast and efficient to install, features ultra quiet operation, and has 12 speed settings via the remote control.


- Available in 900mm, 1270mm, and 1470mm sizes.
- Innovative blade geometry maximises air flow & fan efficiency
- Made from durable ABS for a long working life
- Engineered for fast and efficient installation
- Pre-balanced for smoother, low noise operation
- Suitable for indoor and covered outdoor areas
- Quick connect terminals simplify wiring
- 12 speed (with remote control)
- Remote and wall controller included
- Optional CCT LED light kit available with dimming function via remote

DIMENSIONS


900MM MODEL WITH/WITHOUT OPTIONAL LED LIGHT KIT



1270MM MODEL WITH/WITHOUT OPTIONAL LED LIGHT KIT



1470MM MODEL WITH/WITHOUT OPTIONAL LED LIGHT KIT



Dimensions in grey include optional LED light sold separately.

SPECIFICATIONS

MODEL	DESCRIPTION	COLOUR	MAX. AIR FLOW M³/HR	WATTS	VOLTS	HERTZ
FLRDC36WH	900mm/35.4" Fan	White	12,630	40	220-240	50
FLRDC36BK	900mm/35.4" Fan	Black	12,630	40	220-240	50
FLRDC50WH	1270mm/50" Fan	White	11,700	40	220-240	50
FLRDC50BK	1270mm/50" Fan	Black	11,700	40	220-240	50
FLRDC58WH	1470mm/57.9" Fan	White	12,480	40	220-240	50
FLRDC58BK	1470mm/57.9" Fan	Black	12,480	40	220-240	50
FLRDCLEDKITWH	LED Light Kit	White	-	20	-	-
FLRDCLEDKITBK	LED Light Kit	Black	-	20	-	-

^{*}Conditions apply. 2 year in home warranty service plus another 4 years on parts. For details visit: fantechtrade.com.au/warranty

LED LIGHT KIT SPECIFICATIONS	FLRDCLEDKITWH (WHITE) FLRDCLEDKITBK (BLACK)			
LED Watts			20	
Light Colour Temperature		3000K	4000K	5000K
Lumens		1100	1250	1150
Dimmable			via remote	
OPTIONAL DOWNRODS				
PRODUCT CODE	LENGTH		COLOU	JR
RODDC900WH	900mm		White	
RODDC900BK	900mm		Black	
RODDC1500WH	1500mm		White	
RODDC1500BK	1500mm		Black	

^{**}White remote comes with white fan, black remote comes with black fan. Wall controller and remote cannot be used in conjunction with each other.






The Scud DC ceiling fan is available with 3 or 4 blades and with or without LED light. It is fitted with an energy efficient DC motor that is super quiet, and provides up to 12 adjustable speed settings. The Scud DC is lightweight and has been engineered for fast installation.


- High quality and energy efficient DC motor
- Available in three and four blade models
- Innovative blade geometry maximises air flow & fan efficiency
- Provides exceptional air circulation and cooling effect
- Suitable for indoor and covered outdoor areas
- Quick connect terminals simplify wiring
- Made from durable ABS for a long working life
- Pre-balanced for smoother, low noise operation
- 12 speed (with remote control)
- Remote and wall controller included
- CCT LED light kit models are dimmable using remote control included with the fan

DIMENSIONS

3 BLADE MODEL WITH/WITHOUT LED LIGHT



4 BLADE MODEL WITH/WITHOUT LED LIGHT

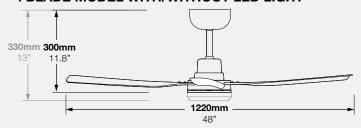

Dimensions in grey are for models with LED light.

SPECIFICATIONS

MODEL	DESCRIPTION	NO. OF FAN BLADES	COLOUR	MAX. AIR FLOW M³/HR	LED LIGHT	WATTS	VOLTS	HERTZ
SCUDC48WH3	1220mm/48" fan	3	White	11,520	No	40	220-240	50
SCUDC48WH4	1220mm/48" fan	4	White	12,120	No	40	220-240	50
SCUDC48WHLED3	1220mm/48" fan	3	White	11,520	Yes	40	220-240	50
SCUDC48WHLED4	1220mm/48" fan	4	White	12,120	Yes	40	220-240	50

LED LIGHT SPECIFICATIONS			8WHLED3 (3 8WHLED4 (4	
LED Watts			16	
Light Colour Temperature		3000K	4000K	5000K
Dimmable			via remote	
OPTIONAL DOWNRODS				
PRODUCT CODE	LENGTH		COLOU	IR
RODDC900WH	900mm		White	
RODDC1500WH	1500mm		White	

^{*}Conditions apply. 2 year in home warranty service plus another 1 year on parts. For details visit: fantechtrade.com.au/warranty

^{**}Wall controller and remote cannot be used in conjunction with each other.



ATMDCMWH & ATMDC72BLADEWH ATMDCMWH & ATMDC82BLADEWH ATMDCMWH & ATMDC92BLADEWH

Atmos Black ATMDCMBK & ATMDC72BLADEBK ATMDCMBK & ATMDC82BLADEBK ATMDCMBK & ATMDC92BLADEBK


Atmos Black with LED Light Kit ATMDCMBK, ATMDC72BLADEBK & ATMDCLEDKITBK ATMDCMBK, ATMDC82BLADEBK & ATMDCLEDKITBK ATMDCMBK, ATMDC92BLADEBK & ATMDCLEDKITBK



The energy efficient Atmos DC ceiling fan is suitable for large open indoor, and covered outdoor entertainment areas. It comes with 8 blades and is available in 1840mm, 2080mm and 2340mm fan sizes. Fan motor and blades sold separately.

- Blades available to suit 1840mm, 2080mm and 2340mm fan
- High quality and energy efficient DC motor
- Engineered for fast and efficient installation
- Provides exceptional air circulation and cooling effect
- Quick connect terminals simplify wiring
- Optional CCT LED light kit available with dimming function via remote

DIMENSIONSATMOS WITH/WITHOUT OPTIONAL LED LIGHT KIT



SELECTING YOUR ATMOS DC 8 BLADE CEILING FAN



SPECIFICATIONS

U. — U	0							
MODEL	DESCRIPTION	NO. OF FAN BLADES	MATERIAL	COLOUR	MAX.AIR FLOW M³/HR	WATTS	VOLTS	HERTZ
ATMDCMWH	Fan Motor	-	Metal	White	-	80	220- 240	50
ATMDCMBK	Fan Motor	-	Metal	Black	-	80	220- 240	50
ATMDC72BLADEWH	Blades for 1840mm Fan	8	Aluminium	White	26,700	-	-	-
ATMDC72BLADEBK	Blades for 1840mm Fan	8	Aluminium	Black	26,700	-	-	-
ATMDC82BLADEWH	Blades for 2080mm Fan	8	Aluminium	White	27,000	-	-	-
ATMDC82BLADEBK	Blades for 2080mm Fan	8	Aluminium	Black	27,000	-	-	-
ATMDC92BLADEWH	Blades for 2340mm Fan	8	Aluminium	White	27,600	-	-	-
ATMDC92BLADEBK	Blades for 2340mm Fan	8	Aluminium	Black	27,600	-	-	-
ATMDCLEDKITWH	LED Light Kit	-	-	White	-	33	-	-
ATMDCLEDKITBK	LED Light Kit	-		Black	-	33	-	-

LED LIGHT SPECIFICATIONS			CLEDKITWH (
LED Watts			33	
Light Colour Temperature		3000K	4000K	5000K
Lumens		2000	2300	2200
Dimmable			via remote	
OPTIONAL DOWNRODS				
PRODUCT CODE	LENGTH		COLOL	JR .
RODDCATM900WH	900mm		White	
RODDCATM900BK	900mm		Black	
RODDCATM1500WH	1500mm		White	
RODDCATM1500BK	1500mm		Black	
Eant	ook Trada D	C Cailing	, Fono	144

DC RANGE OVERVIEW

QUINTON DC







FLAIR DC









SCUD DC









ATMOS DC









FANTECHTRADE !!! MADE FOR TRADE







www.fantechtrade.com.au www.fantechtrade.co.nz

Australia: 1300 387 587 New Zealand: 0800 106 266

For	sales	enquiries	contact:
-----	-------	-----------	----------

Specifications and design subject to change without notice.