



TECHNICAL DATASHEET

SUB FLOOR VENTILATION (SF SERIES)**DESCRIPTION**

**Features Available in 240V and 12V Three-pin plug (240V only) Quiet operation 12-month warranty
Optional transformer available**


Features

- Available in 240V and 12V
- Three-pin plug (240V only)
- Quiet operation
- 12-month warranty
- Optional transformer available


TECHNICAL DATA

Model	Code	Flow	Cut-out Size	V	Hz	W	m3hr	L/s	dBA @ 3 m
SFE9712	ALV252	Exhaust Fan	232 x 167	12	50	13	328	91	45
SFE9724	ALV253	Exhaust Fan	232 x 167	240	50	35	328	91	45
SFS9712	ALV254	Supply Fan	232 x 167	12	50	13	328	91	45
SFS9724	ALV255	Supply Fan	232 x 167	240	50	35	328	91	45

PERFORMANCE CURVE

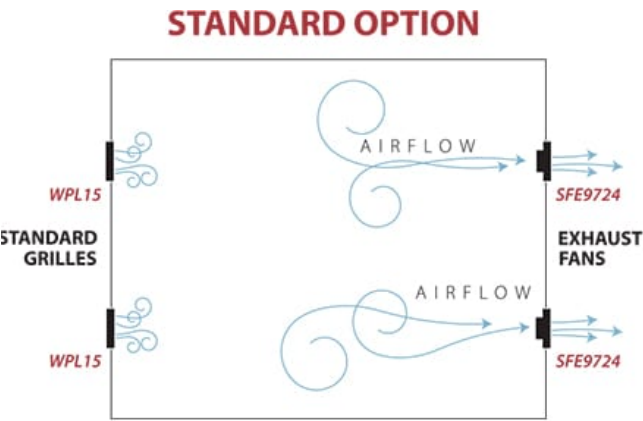

- *Standard grille (WPL15)* allow natural flow inlet air
- *Exhaust fan (SFE9724)* extract air from building space

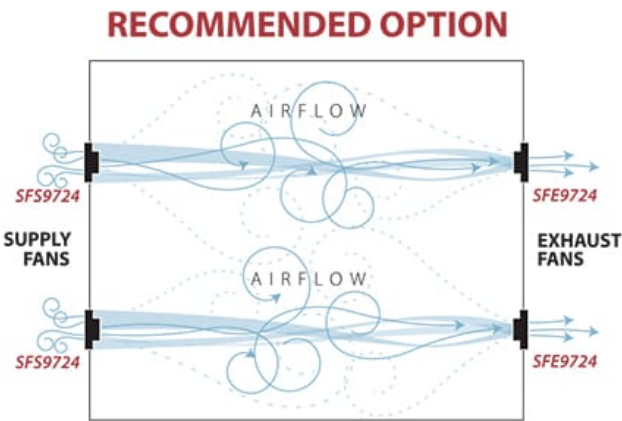

- *Supply fan (SFS9724)* introduce outside air
- *Exhaust fan (SFE9724)* extract air from building space
- **Creates** better cross-flow and removes air from complete building space (no 'dead' spots)

DIMENSIONS

